READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.

INSTRUCTION SHEET NO.

IS:8021DW

A0399

INSTALLATION OF CALCULITE COMPACT FLUORESCENT DOUBLE & CORNER WALL WASHER TRIMS.

1. FRAME-IN

See Frame-In-Kit Instruction Sheet for installation instructions.

2. REMOVE PRE-INSTALLED SPRINGS

Use pliers to remove all 4 springs on FRAME (Fig.1)

3. SNAP-IN-SOCKET HOUSING

Engage RETAINING SPRING into SLOT of REFLECTOR NECK (Fig. 2). NOTE: Refer to label on inside of REFLECTOR NECK for proper lamping position. See Frame-In-Kit for lamp information.

4. INSTALL SOCKET HOUSING ASSEMBLY

Pass SOCKET HOUSING ASSEMBLY through aperture opening of FRAME as shown in (Fig. 3).

5. SNAP-IN-SOCKET HOUSING ASSEMBLY TO FRAME

a) Align side legs of SOCKET HOUSING ASSEMBLY with vertical MOUNTING SUPPORTS on either side of FRAME.

b) Snap prongs on bottom of side legs into slot on FRAME until SOCKET HOUSING ASSEMBLY is secure to FRAME (Fig. 4).

6. INSTALL KICK REFLECTORS

We recommend using clean white or plastic film gloves when installing reflectors to avoid fingerprints.

a) Align SLOT in top portion of KICK REFLECTOR with CLIP on RING (Fig. 5).

b) Repeat for second KICK REFLECTOR.

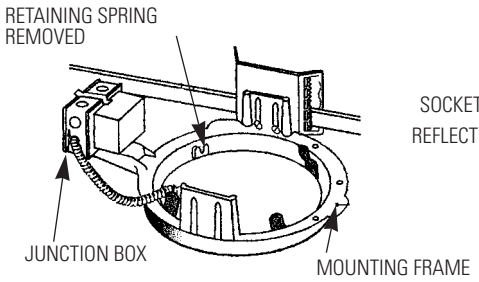

FIG. 1

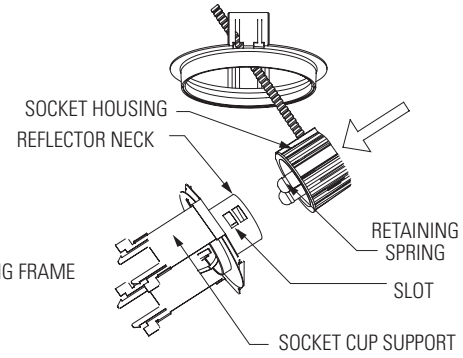

FIG. 2

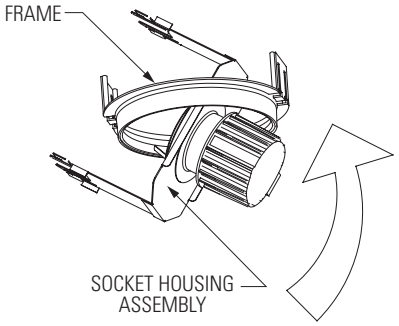

FIG. 3

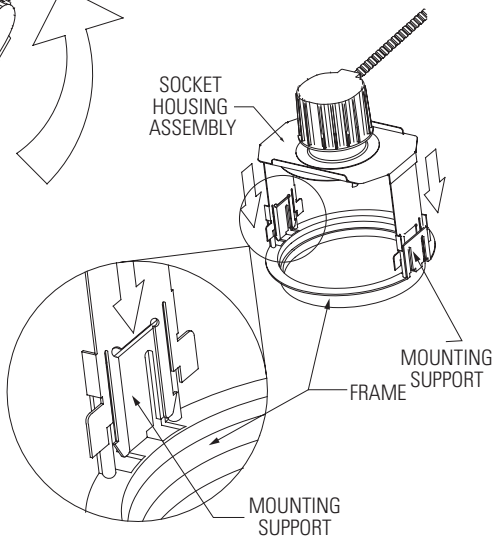

FIG. 4

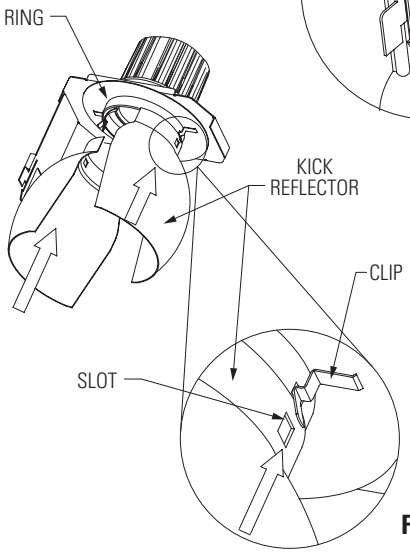

FIG. 5

LIGHTOLIER®

LIGHTOLIER a GENLYTE THOMAS company.

631 Airport Road, Fall River, MA 02720

7. POSITION KICK REFLECTORS

a.) After KICK REFLECTORS are properly assembled to CLIPS, rotate RING to align KICK REFLECTORS opposite walls to be illuminated.
For double wall washer see (Fig. 6).
For corner wall washer see (Fig. 7).

8. PUSH-IN

a.) For overlapping flange installation (Fig. 8), slip WHITE TRIM RING over REFLECTOR. For Flangeless (Fig. 9) and Self Flanged Trims, WHITE TRIM RING is not required.
b.) Push REFLECTOR straight up to engage 3 RETAINING SPRINGS.
For double wall washer see (Fig. 10).
For corner wall washer see (Fig. 11).
c.) Final adjustment can be achieved by rotating REFLECTOR. NOTE: To remove REFLECTOR squeeze RETAINING SPRINGS to disengage top portion of reflector.

9. CARE AND MAINTENANCE OF ALZAK REFLECTOR

REFLECTOR surfaces can be cleaned by the following methods:
a.) Wipe off with a soft, clean, dry, lint-free cloth.
b.) Wipe off with a soft clean cloth dampened in mild detergent solution. Rinse, the wipe dry with lint-free cloth or paper towel.
c.) Wipe off with a clean cloth dampened with a solution of wetting agent and water (such as 2 oz. per gallon "Pluronic L62-LF" by Wyandotte Products). Then wipe dry.

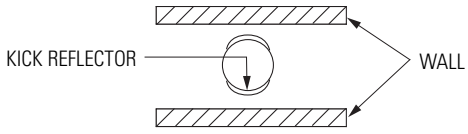

FIG. 6



FIG. 7

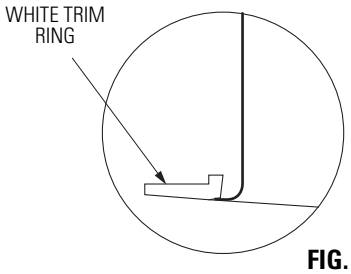

FIG. 8


FIG. 9

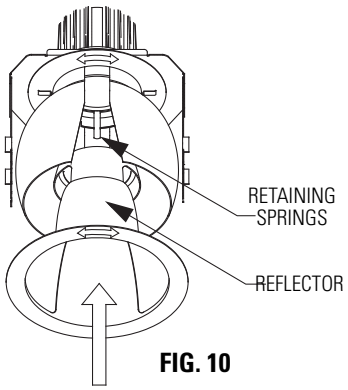

FIG. 10

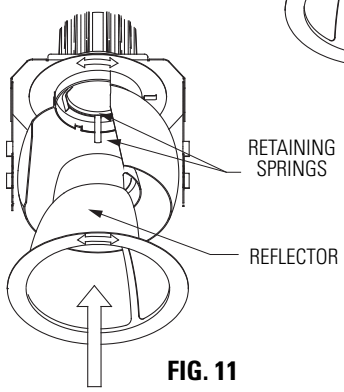

FIG. 11

US & FOREIGN PAT. PENDING